

# PM-42CG

## CLUTCH GUARD MOUNTING INSTRUCTIONS

Thank you for your purchase of the Performance Clutch Guard.

Please do not hesitate to contact us if you need assistance.




### PM-42CG CLUTCH GUARD MOUNTING INSTRUCTIONS:

DRILLING WILL BE REQUIRED ON MOST MODEL CHAIN GUARDS. USE DRILLING LOCATIONS BELOW AS A GUIDE FOR DRILLING

OF TWO  $\frac{7}{16}$ " HOLES IN TWO PLACES.

FASTEN CLUTCH GUARD TO THE CHAIN GUARD USING THE SUPPLIED DZUS BUTTONS. THE SUPPLIED WASHERS MAY OR MAY NOT BE NEEDED, DEPENDING ON THE THICKNESS OF THE CHAIN GUARD IT IS MOUNTED TO.

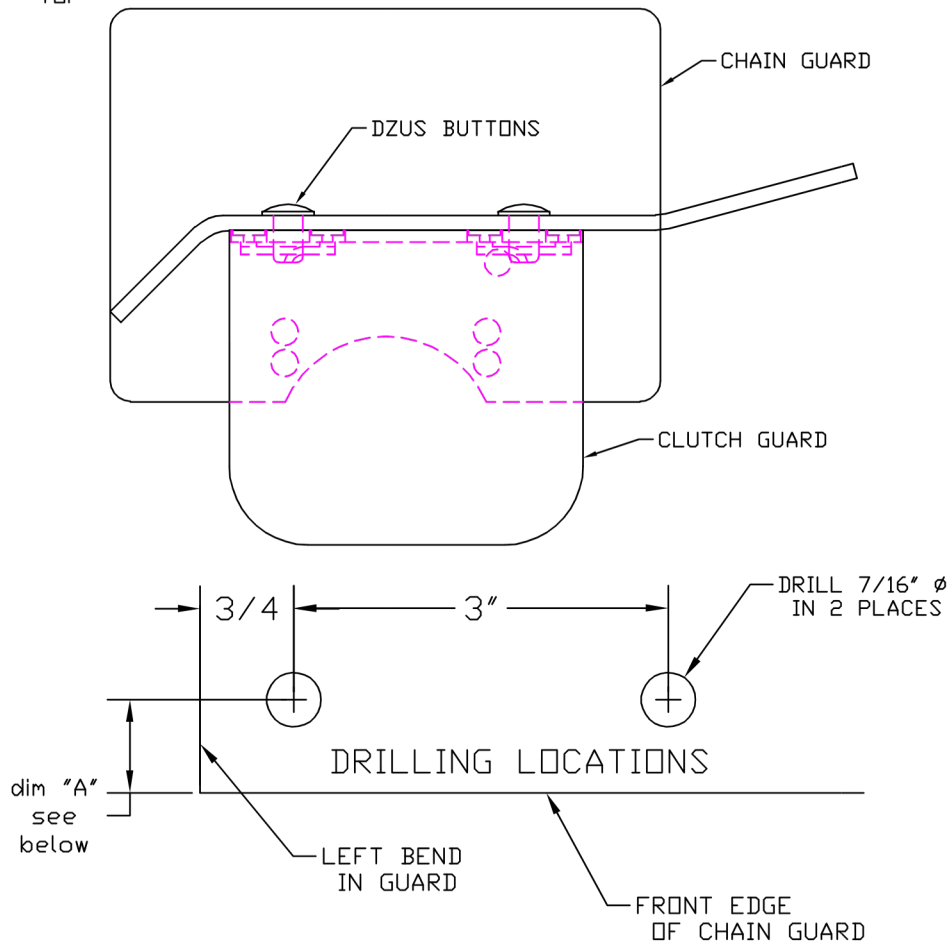

Determine "A" dimension by positioning clutch guard on chain guard with a minimum of  $\frac{3}{8}$ " clearance between clutch and chain guard (clutch levers move outward towards guard during clutch engagement)

**PMCKART.COM**

**(716) 735-3500**